

CJD型 报警电笛

概述

Overview

CJD型报警电笛采用高响度防水喇叭及数字技术，通过声调选择接口可使单只电笛发出多种报警音调，报警音调具有优先级功能并可选配多种带灯报警标志。本电笛采用模块化设计，体积小、重量轻、响度强，已广泛应用于舰船机舱等高噪音场所。

CJD Alarm horn uses high loudness waterproof speaker and digital technology; a single electric horn can emit various alarm tones through a tone selector interface, and the alarm tone is given a priority and the electric horn can be equipped with a variety of alarm marks with lamp. This electric horn is modular designed, with small size, light weight and strong loudness, and has been widely used in ship engine room and other noisy places.



C J D - B D / Q L 1 D 3



C J D - M 2 / B L 1 D 3

型号命名

Designation

报警电笛
Alarm horn

CJD - /

电源 BD: C04V D DC1220V 2 AC1220V
Power supply BD: C04V D DC1220V 2 AC1220V

安装方式 B: 挂式 : 嵌入式
Installation mode: B: wall-mounted, Q: embedded

可选项 L: 带灯
Option L: with lamp

1:	2:	3:	4:
通用报警 General alarm	弃船报警 Abandoned ship alarm	CO2施放报警 CO2 release alarm	火灾报警 Fire alarm
5:	6:	7:	8:
电话呼叫 Phone call	车钟呼叫 Telegraph call	死人报警 Dead alarm	机器故障 Machine failure
9:	10:	11:	12:
病房呼叫 Ward call	冷库呼叫 Refrigerator call	加油站 Petrol station	无报警标志 No alarm mark

D1: 连续调 Single continuous tone D2 单音断鸣调 Single off-sound tone D3 单音断鸣调 (七短一长调)
(seven short and one long tone)

D4: 颤调频调 Continuous frequency modulation tone D5: 紧急调频调 Emergency frequency modulation tone D6: 快双音调 Fast dual tone

D7: 三音调 Tri-tone D8: 定制要求 Customize according to requirements D

主要技术性能指标

Main technical performance indicators

■ 型电源电压: 额定电压±20%

Supply voltage: Rated voltage ± 20%

■ 功耗: ≤15W (不带灯)
≤20W (带灯)

Power consumption:

≤15W (without lamp);

≤20W (with lamp)

■ 声级: ≤110dB(距离1米)


Sound level: ≤110dB (at distance of 1 m)

■ 外壳颜色: 红色

Housing color: red

■ 防护等级: IP56

Protection grade:IP56



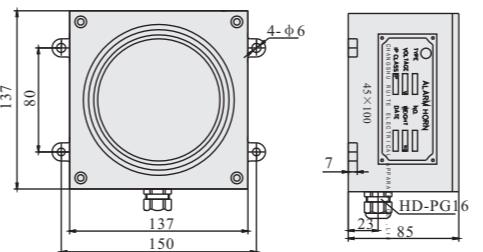


CJD - M2 / BD1 CJD - BD / BD1 CJD - BD / QD1


外形尺寸

Boundary dimensions

型号 Model	外形尺寸 Boundary dimensions	安装尺寸 Mounting dimensions
CJD-BD/Q□	137 × 137 × 85 mm	122 × 122 mm(安装孔4-Φ6) (Mounting hole4-Φ6)
CJD-BD/B□	137 × 137 × 85 mm	150 × 80 mm(安装孔4-Φ6) (Mounting hole4-Φ6)
CJD-BD/QL□□	137 × 207 × 85 mm	152 × 80 mm(安装孔4-Φ6) (Mounting hole4-Φ6)
CJD-M2/B□	137 × 212 × 85 mm	152 × 146 mm(安装孔4-Φ6) (Mounting hole4-Φ6)
CJD-M2/BL□□	137 × 282 × 85 mm	152 × 146 mm(安装孔4-Φ6) (Mounting hole4-Φ6)

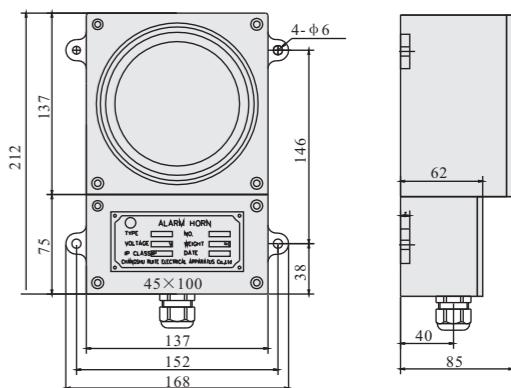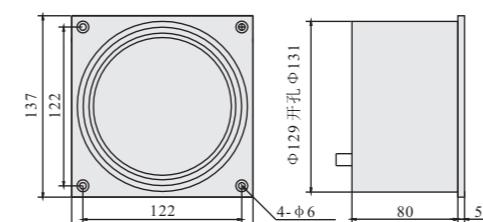

红色面罩, 绿色图案
Red mask, green pattern

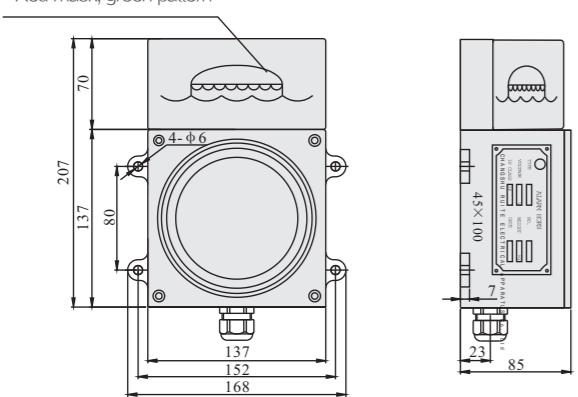

红色面罩, 绿色图案
Red mask, green pattern

